

HUNTERSVILLE, NORTH CAROLINA USA



— EFFECTIVE SEPTEMBER 1, 2005 —

Easy-Twist

WIRE CONNECTORS





**FD-101
FLOOR DISPLAY**




**FD-105
FLOOR DISPLAY**

OTHER DISPLAYS AVAILABLE: FD-102, 103, 104, 106 AND GRAVITY FEED DISPLAYS: GF-01 AND GF-02



Table of Contents

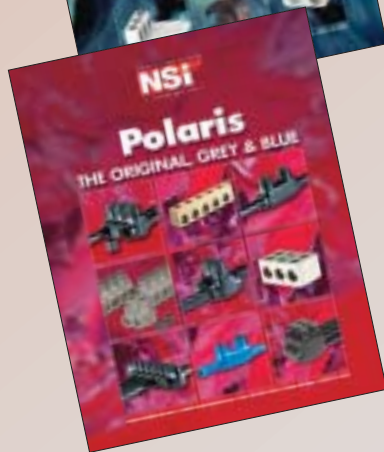

EASY-TWIST™

TWIST-ON WIRE CONNECTOR

Combination Pails	2
Winged	3
Winged Grounding	4
N Type	4
Standard Type	5

TWIST-ON SPECIALTY WIRE CONNECTORS

H Type	6
All-Plastic	6
High Temperature	7

OTHER WIRE CONNECTORS

Crimp Sleeve	7
Nylon Closed End	7

PUSH-IN WIRE CONNECTORS

Push-In	8
Installation & Voltage Testing	8

THE FINE PRINT

Alphanumeric Index	9
How to Reach Us	9
Terms and Conditions	9


EASY-TWIST WIRE CONNECTORS ARE AVAILABLE IN A VARIETY OF PACKAGING AND MERCHANDISING OPTIONS. CALL YOUR INSIDE SALES REPRESENTATIVE AT 800-321-5847 TO FIND OUT MORE!



Easy-Twist™

WINGED WIRE CONNECTORS


WINGED WIRE CONNECTORS

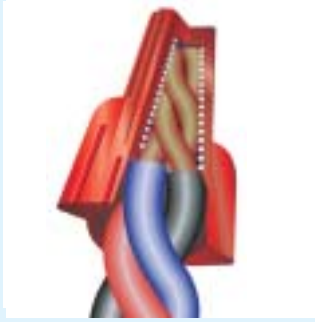

- Exceptional design makes twisting easier, ensuring proper installation – especially in tight spaces;
- Deep surface ridges provide better grip;
- Threaded funnel entry guides the wires into the connector easily;
- Swept-back wing design provides handling comfort and increased torquing ability;
- Square wire spring provides secure gripping of conductors;

- Deep skirt entry provides protection from flashover and shorts;
- Flame retardant thermoplastic shell provides excellent electrical insulation;
- Temperature rating 105°C (221°F);
- Pre-twisting of wires is not necessary;
- 1,000 volt maximum in fixtures and signs.

DIMENSIONS

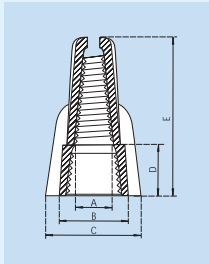

CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WWC-Y	6.40	0.252	9.80	0.386	18.20	0.717	9.00	0.354	25.80	1.016
WWC-T	7.20	0.283	11.60	0.457	18.30	0.720	9.20	0.362	29.00	1.142
WWC-R	9.00	0.354	13.50	0.531	23.00	0.906	9.60	0.378	31.80	1.252
WWC-G	10.00	0.394	14.90	0.587	25.50	1.000	10.00	0.394	33.30	1.311
WWC-B	12.00	0.472	18.80	0.740	32.00	1.260	13.10	0.516	40.00	1.575

DIVIDED COMBINATION PAILS

ITEM	CATALOG NO.	NAED NO.	QUANTITY/CONTENTS				PACKAGING CARTON	WEIGHT LBS./CTN.	NET PRICE PER PAIL	
								UNIT	CARTON	
HANDY PACK PAIL #1	ET-CP-1	14190	70 WWC-T	80 WWC-Y	45 WWC-R	20 WWC-B	12 pails	27	28.65	24.90
HANDY PACK PAIL #2	ET-CP-2	14191	100 WC-O	75 WC-Y	50 WC-R	70 WWC-T	12 pails	24	24.95	21.75
HANDY PACK PAIL #3	ET-CP-3	14192	100 WC-O	70 WWC-T	80 WWC-Y	45 WWC-R	12 pails	25	26.35	22.90
FOUR-PACK PAIL #1	ET-CP-11	14193	40 WWC-T	50 WWC-Y	30 WWC-R	10 WWC-B	18 pails	20	18.25	15.85
FOUR-PACK PAIL #2	ET-CP-12	14194	65 WC-O	45 WC-Y	30 WC-R	40 WWC-T	18 pails	18	15.95	13.90
FOUR-PACK PAIL #3	ET-CP-13	14195	60 WC-O	45 WWC-T	50 WWC-Y	30 WWC-R	18 pails	19	17.20	14.95



Handy-Pack and Four-Pack pails offer you the convenience of the most common Easy-Twist connectors. Three different sets are available in two different sized pails.



Socket installation tools are included at no extra charge in each **bag** of Easy-Twist connectors (catalog number with B suffix, excluding Blue Winged Wire connectors). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.



Easy-Twist™

WINGED WIRE CONNECTORS

WINGED WIRE CONNECTORS



	CATALOG NO.	NAED NO.	UNIT	PACKAGING		PRICE PER	WEIGHT LBS./CTN.	NET PRICE	
					CARTON			UNIT	CARTON
 YELLOW 18-10 AWG WIRE RANGE: max: 3 #12 min: 2 #18 VOLTAGE: 600 volt/300 volt**	WWC-Y-H	14104	bag of 25 with header	1,000	(40 bags of 25)	pkg.	5	3.09	2.69
	WWC-Y-C	14101	box of 100	6,000	(60 boxes of 100)	1,000	29	88.90	77.25
	WWC-Y-CJ	14232	small jar of 100	2,400	(24 jars of 100)	jar	13	10.20	8.85
	WWC-Y-SJ	14243	standard jar of 200	2,400	(12 jars of 200)	jar	13	17.20	14.95
	WWC-Y-J	14105	large jar of 550	5,500	(10 jars of 550)	jar	23	46.40	40.40
	WWC-Y-P	14182	pail of 350	4,200	(12 pails of 350)	pail	19	30.20	26.25
	WWC-Y-B*	14102	bag of 500	5,000	(10 bags of 500)	1,000	20	73.50	63.90
	WWC-Y	14103	bulk	10,000		1,000	38	69.95	60.95
WWC-Y-D	14106	fibre drum	35,000		1,000	94	69.95	60.95	
 TAN 22-8 AWG WIRE RANGE: max: 3 #10 min: 3 #22 VOLTAGE: 600 volt/300 volt**	WWC-T-H	14132	bag of 25 with header	1,000	(40 bags of 25)	pkg.	9	3.39	2.99
	WWC-T-C	14124	box of 100	4,800	(48 boxes of 100)	1,000	43	116.50	101.30
	WWC-T-CJ	14233	small jar of 100	2,400	(24 jars of 100)	jar	21	12.59	10.95
	WWC-T-SJ	14244	standard jar of 150	1,800	(12 jars of 150)	jar	17	17.20	14.95
	WWC-T-J	14147	large jar of 450	4,500	(10 jars of 450)	jar	40	48.55	42.25
	WWC-T-P	14181	pail of 300	3,600	(12 pails of 300)	pail	33	34.20	29.75
	WWC-T-B*	14125	bag of 500	5,000	(10 bags of 500)	1,000	37	94.70	82.35
	WWC-T	14126	bulk	10,000		1,000	72	91.35	79.45
WWC-T-D	14006	fibre drum	30,000		1,000	206	91.35	79.45	
 RED 18-8 AWG WIRE RANGE: max: 5 #12 min: 3 #16 VOLTAGE: 600 volt/300 volt**	WWC-R-H	14114	bag of 25 with header	1,000	(40 bags of 25)	pkg.	11	3.39	2.99
	WWC-R-C	14111	box of 100	3,600	(36 boxes of 100)	1,000	35	118.95	103.45
	WWC-R-SJ	14245	standard jar of 100	1,200	(12 jars of 100)	jar	13	12.60	10.95
	WWC-R-J	14115	large jar of 300	3,000	(10 jars of 300)	jar	23	34.50	29.95
	WWC-R-P	14180	pail of 200	2,400	(12 pails of 200)	pail	20	24.10	20.95
	WWC-R-B*	14112	bag of 500	5,000	(10 bags of 500)	1,000	39	95.70	83.20
	WWC-R	14113	bulk	10,000		1,000	74	90.85	78.90
	WWC-R-D	14116	fibre drum	20,000		1,000	216	90.85	78.90
 GREY 18-8 AWG WIRE RANGE: max: 3 #10 min: 3 #14 w/1 #18 VOLTAGE: 600 volt max**	WWC-G-C	14139	box of 50	2,400	(48 boxes of 50)	1,000	32	232.30	202.00
	WWC-G-SJ	14246	standard jar of 50	600	(12 jars of 50)	jar	11	12.90	11.20
	WWC-G-P	14178	pail of 150	1,800	(12 pails of 150)	pail	27	34.20	29.75
	WWC-G-B*	14140	bag of 250	2,500	(10 bags of 250)	1,000	32	193.80	168.50
	WWC-G	14141	bulk	5,000		1,000	63	186.50	162.20
 BLUE 14-6 AWG WIRE RANGE: max: 1 #8 w/3 #10 min: 2 #10 w/1 #12 VOLTAGE: 600 volt max**	WWC-B-H	14131	bag of 6 with header	300	(50 bags of 6)	pkg.	6	2.19	1.89
	WWC-B-C	14121	box of 50	600	(12 boxes of 50)	1,000	11	287.00	249.50
	WWC-B-SJ	14247	standard jar of 50	600	(12 jars of 50)	jar	12	15.65	13.60
	WWC-B-J	14148	large jar of 125	1,250	(10 jars of 125)	jar	24	34.20	29.75
	WWC-B-P	14177	pail of 90	1,080	(12 pails of 90)	pail	22	25.20	21.90
	WWC-B-B*	14122	bag of 100	1,500	(15 bags of 100)	1,000	28	225.80	196.40
	WWC-B	14123	bulk	2,500		1,000	44	214.50	186.50
	WWC-B-D	14007	fibre drum	9,500		1,000	125	214.50	186.50


*Socket installation tools are included at no extra charge in each bag of Easy-Twist connectors (catalog number with "B" suffix). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.



Easy-Twist™

CRIMP SLEEVE, WINGED GROUNDING AND STANDARD TYPE WIRE CONNECTORS

GROUNDING CONNECTORS




- Color coded GREEN for quick identification as a grounding conductor for copper wire only;
- Specifically designed for making positive ground connections and bonding non-metallic sheathed cable;
- Live-action square spring draws wires deep into the spring for a safe, tight grip ensuring an excellent connection;
- Swept-back wing design enables users to tighten connectors easily by hand.

TYPICAL EXAMPLE:

X System grounding wire **Y** System grounding wire **Z** "Through" wire between device and box ground

NOTE: If "through" wire is a jumper, be sure wire extends below skirt 6" min.

CATALOG NO.	NAED NO.	UNIT	PACKAGING		PRICE PER	WEIGHT LBS./CTN.	NET PRICE	
			CARTON	CARTON			UNIT	CARTON
WWC-GR-H	14142	bag of 25 with header	1,000	(40 bags of 25)	pkg.	9	3.69	3.19
WWC-GR-C	14127	box of 100	4,800	(48 boxes of 100)	1,000	30	148.70	129.30
WWC-GR-SJ	14250	standard jar of 100	1,200	(12 jars of 100)	jar	9	16.05	13.95
WWC-GR-J	14149	large jar of 350	3,500	(10 jars of 350)	jar	23	47.85	41.60
WWC-GR-P	14179	pail of 250	3,000	(12 pails of 250)	pail	21	34.40	29.90
WWC-GR-B	14128	bag of 500	5,000	(10 bags of 500)	1,000	31	119.60	104.00
WWC-GR	14129	bulk	10,000		1,000	61	113.60	98.80
WWC-GR-D	14162	fibre drum	25,000		1,000	151	113.60	98.80



DIMENSIONS


CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WWC-GR	8.30	0.327	12.10	0.476	20.20	0.795	9.40	0.370	28.80	1.134

WINGED WIRE CONNECTORS - N TYPE



- Temperature rating 105°C (221°F);
- Made from nylon 6/6 (Polyimide 66);
- Swept-back design provides firm and comfortable twisting;
- Inserted with fixed, square-wire spring grabs wires quickly and firmly;
- Compact design perfect for tight spaces;
- Color coded to industry standards;
- Pre-twisting of wires is not necessary;
- 1,000 volt maximum in fixtures and signs.

CATALOG NO.	NAED NO.	UNIT	PACKAGING		PRICE PER	WEIGHT LBS./CTN.	NET PRICE	
			CARTON	CARTON			UNIT	CARTON
WWC-N1-H	14259	bag of 25 with header	1,000	(40 bags of 25)	pkg.	5	3.29	2.89
WWC-N1-C	14172	box of 100	6,000	(60 boxes of 100)	1,000	27	119.95	104.30
WWC-N1-CJ	14234	small jar of 100	2,400	(24 jars of 100)	jar	11	13.15	11.45
WWC-N1-SJ	14248	standard jar of 250	3,000	(12 jars of 250)	jar	13	29.85	25.95
WWC-N1-J	14151	large jar of 600	6,000	(10 jars of 600)	jar	24	66.65	57.95
WWC-N1-P	14257	pail of 450	5,400	(12 pails of 450)	pail	23	50.55	43.95
WWC-N1-B	14252	bag of 500	5,000	(10 bags of 500)	1,000	20	99.20	86.25
WWC-N1	14253	bulk	10,000		1,000	38	94.65	82.30
WWC-N1-D	14260	fibre drum	45,000		1,000	168	94.65	82.30
WWC-N2-H	14261	bag of 25 with header	1,000	(40 bags of 25)	pkg.	9	3.79	3.29
WWC-N2-C	14175	box of 100	4,800	(48 boxes of 100)	1,000	43	160.60	139.65
WWC-N2-SJ	14249	standard jar of 100	1,200	(12 jars of 100)	jar	12	17.20	14.95
WWC-N2-J	14254	large jar of 400	4,000	(10 jars of 400)	jar	36	62.05	53.95
WWC-N2-P	14258	pail of 250	3,000	(12 pails of 250)	pail	24	40.20	34.95
WWC-N2-B	14255	bag of 500	5,000	(10 bags of 500)	1,000	38	129.15	112.30
WWC-N2	14256	bulk	10,000		1,000	72	122.50	106.50
WWC-N2-D	14262	fibre drum	25,000		1,000	183	122.50	106.50



DIMENSIONS


CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WWC-N1	7.30	0.287	10.90	0.429	12.50	0.492	10.60	0.417	25.20	0.992
WWC-N2	9.10	0.358	13.20	0.520	14.80	0.583	11.50	0.453	29.50	1.161

TWIST-ON WIRE CONNECTORS – STANDARD TYPE



- Flame retardant UL 94V-2 thermoplastic shell provides excellent electrical insulation;
- Temperature rating 105°C (221°F);
- Fixed, precise square wire spring provides secure gripping of conductors;
- Deep skirt entry provides protection from flashover and shorts;

- Sure-grip ribs improve gripping ability and comfort;
- Compact design ensures proper installation – especially in tight spaces;
- Threaded funnel entry guides the wires into the connector easily;
- Pre-twisting of wires is not necessary;
- 1,000 volt maximum in fixtures and signs.



DIMENSIONS

CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WC-G	3.80	0.150	6.70	0.264	8.60	0.339	5.80	0.228	15.20	0.598
WC-B	4.10	0.161	7.00	0.276	9.80	0.386	5.90	0.232	17.60	0.693
WC-O	5.00	0.197	9.90	0.390	12.20	0.480	7.80	0.307	22.00	0.866
WC-Y	6.00	0.236	11.20	0.441	14.00	0.551	7.90	0.311	24.00	0.945
WC-R	7.50	0.295	13.00	0.511	16.40	0.645	9.15	0.360	26.50	1.042

GREY 22-14 AWG
WIRE RANGE: max: 1 #14 w/1 #20 min: 2 #22
VOLTAGE: 300 volt

BLUE 22-14 AWG
WIRE RANGE: max: 3 #16 min: 2 #22
VOLTAGE: 300 volt

ORANGE 22-14 AWG
WIRE RANGE: max: 4 #16 w/1 #20 min: 1 #18 w/1 #20
VOLTAGE: 600 volt max**

YELLOW 22-10 AWG
WIRE RANGE: max: 1 #10 w/2#14 w/1 #16 min: 3 #20
VOLTAGE: 600 volt max**

RED 22-8 AWG
WIRE RANGE: max: 3 #10 min: 3 #18
VOLTAGE: 600 volt max**

CATALOG NO.	NAED NO.	PACKAGING		PRICE PER	WEIGHT		NET PRICE	
		UNIT	CARTON		LBS./CTN.	UNIT	CARTON	
WC-G-H	14004	bag of 25 with header	1,000 (40 bags of 25)	pkg.	2	1.89	1.59	
WC-G-C	14001	box of 100	6,000 (60 boxes of 100)	1,000	8	49.15	42.70	
WC-G-SJ	14107	small jar of 300	3,600 (12 jars of 300)	jar	8	15.25	13.25	
WC-G-B*	14002	bag of 1,000	20,000 (20 bags of 1,000)	1,000	24	45.60	38.90	
WC-G	14003	bulk	25,000	1,000	29	39.50	34.40	
WC-B-H	14014	bag of 25 with header	1,000 (40 bags of 25)	pkg.	3	1.99	1.69	
WC-B-C	14011	box of 100	6,000 (60 boxes of 100)	1,000	12	54.60	47.50	
WC-B-SJ	14239	small jar of 300	3,600 (12 jars of 300)	jar	8	16.95	14.75	
WC-B-B*	14012	bag of 1,000	10,000 (10 bags of 1,000)	1,000	19	51.75	44.95	
WC-B	14013	bulk	10,000	1,000	18	46.40	40.40	
WC-O-H	14024	bag of 25 with header	1,000 (40 bags of 25)	pkg.	4	2.19	1.89	
WC-O-C	14021	box of 100	6,000 (60 boxes of 100)	1,000	18	64.30	55.25	
WC-O-CJ	14230	small jar of 100	2,400 (24 jars of 100)	jar	8	7.65	6.65	
WC-O-SJ	14240	standard jar of 300	3,600 (12 jars of 300)	jar	12	19.25	16.75	
WC-O-J	14025	large jar of 700	7,000 (10 jars of 700)	jar	20	45.90	39.90	
WC-O-P	14174	pail of 500	6,000 (12 pails of 500)	pail	17	32.80	28.50	
WC-O-B*	14022	bag of 500	5,000 (10 bags of 500)	1,000	14	57.35	49.85	
WC-O	14023	bulk	10,000	1,000	27	54.65	47.50	
WC-O-D	14026	fibre drum	50,000	1,000	130	54.65	47.50	
WC-Y-H	14034	bag of 20 with header	1,000 (50 bags of 20)	pkg.	7	2.39	2.09	
WC-Y-C	14031	box of 100	6,000 (60 boxes of 100)	1,000	34	76.50	66.50	
WC-Y-CJ	14231	small jar of 100	2,400 (24 jars of 100)	jar	15	8.90	7.75	
WC-Y-SJ	14241	standard jar of 200	2,400 (12 jars of 200)	jar	15	15.80	13.75	
WC-Y-J	14035	large jar of 500	5,000 (10 jars of 500)	jar	29	39.35	34.20	
WC-Y-P	14176	pail of 300	3,600 (12 pails of 300)	pail	23	23.60	20.50	
WC-Y-B*	14032	bag of 500	5,000 (10 bags of 500)	1,000	28	62.95	57.95	
WC-Y	14033	bulk	10,000	1,000	54	62.60	54.40	
WC-Y-D	14036	fibre drum	35,000	1,000	185	62.60	54.40	
WC-R-H	14044	bag of 20 with header	1,000 (50 bags of 20)	pkg.	12	2.69	2.39	
WC-R-C	14041	box of 100	3,600 (36 boxes of 100)	1,000	39	112.10	97.50	
WC-R-SJ	14242	standard jar of 100	1,200 (12 jars of 100)	jar	15	12.50	10.85	
WC-R-J	14045	large jar of 350	3,500 (10 jars of 350)	jar	38	38.85	33.25	
WC-R-P	14173	pail of 200	2,400 (12 pails of 200)	pail	25	22.35	19.45	
WC-R-B*	14042	bag of 500	5,000 (10 bags of 500)	1,000	40	92.00	79.90	
WC-R	14043	bulk	5,000	1,000	39	87.50	75.90	
WC-R-D	14046	fibre drum	25,000	1,000	195	87.50	75.90	

*Socket installation tools are included at no extra charge in each bag of Easy-Twist connectors (catalog number with "-B" suffix). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.


TWIST-ON WIRE CONNECTORS – H TYPE



- Flame retardant UL 94V-2 thermoplastic shell provides excellent electrical insulation;
- Temperature rating 105°C (221°F);
- Fixed, precise square wire spring provides secure gripping of conductors;
- Sure-grip ribs improve gripping ability and comfort;
- Deep skirt entry provides protection from flashover and shorts;
- Compact design ensures proper installation – especially in tight spaces;
- Threaded funnel entry guides the wires into the connector easily;
- Pre-twisting of wires is not necessary;
- 1,000 volt maximum in fixtures and signs.

CATALOG NO.	NAED NO.	COLOR CODE	VOLTAGE	WIRE RANGE			PACKAGING		WEIGHT LBS/CTN.	NET PRICE PER 1,000	
				MAXIMUM	MINIMUM	UNIT	CARTON	UNIT		CARTON	
WC-OH-B*	14027	orange	600 volt max**	22-14 AWG	4 #16 w/ 1 #20	1 #18 w/ 1 #20	bag of 500	10,000 (20 bags of 500)	14	52.20	45.40
WC-OH	14028	orange	600 volt max**	22-14 AWG	4 #16 w/ 1 #20	1 #18 w/ 1 #20	bulk	10,000	27	49.10	42.70
WC-YH-B*	14037	yellow	600 volt max**	22-10 AWG	1 #10 w/ 2 #14 w/1 #16	3 #20	bag of 500	5,000 (10 bags of 500)	28	64.30	55.90
WC-YH	14038	yellow	600 volt max**	22-10 AWG	1 #10 w/ 2 #14 w/1 #16	3 #20	bulk	10,000	54	61.40	53.40
WC-RH-B*	14047	red	600 volt max**	22-8 AWG	3 #10	3 #18	bag of 500	5,000 (10 bags of 500)	24	83.90	72.95
WC-RH	14048	red	600 volt max**	22-8 AWG	3 #10	3 #18	bulk	5,000	39	79.15	68.85

*Socket installation tools are included at no extra charge in each bag of Easy-Twist connectors (catalog number with “-B” suffix). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.



DIMENSIONS


CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WC-OH	5.00	0.197	9.90	0.390	12.20	0.480	7.80	0.307	21.90	0.862
WC-YH	6.00	0.236	11.20	0.441	14.00	0.551	7.90	0.311	24.00	0.945
WC-RH	7.00	0.276	12.80	0.504	16.00	0.630	8.90	0.350	26.60	1.047

ALL-PLASTIC WIRE CONNECTORS



- Flame retardant UL 94V-2 thermoplastic shell provides excellent electrical insulation;
- Temperature rating 105°C (221°F);
- Sure-grip ribs improve gripping ability and comfort;
- Compact design ensures proper installation – especially in tight spaces.

CATALOG NO.	NAED NO.	COLOR CODE	VOLTAGE	WIRE RANGE			PACKAGING		WEIGHT LBS/CTN.	NET PRICE PER 1,000	
				MAXIMUM	MINIMUM	UNIT	CARTON	UNIT		CARTON	
PC-1	14090	yellow	300 volt	22-16 AWG	2 #16 w/ 1 #22	2 #22	bag of 1,000	20,000 (20 bags of 1,000)	19	28.50	24.80
PC-2	14091	ivory	300 volt	22-16 AWG	3 #16	3 #20	bag of 1,000	20,000 (20 bags of 1,000)	22	33.85	29.45
PC-3	14092	ivory	300 volt	22-14 AWG	2 #14 str. w/ 1 #20	2 #22	bag of 1,000	10,000 (10 bags of 1,000)	29	42.90	37.30



DIMENSIONS

CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
PC-1	3.20	0.126	6.50	0.256	8.60	0.339	4.35	0.171	14.30	0.563
PC-2	4.00	0.157	7.90	0.311	10.00	0.394	4.80	0.189	17.20	0.677
PC-3	4.00	0.157	9.10	0.358	11.10	0.437	8.30	0.327	22.20	0.874

HIGH TEMPERATURE 150°C



- Flame retardant UL 94V-2 thermoplastic shell provides excellent electrical insulation;
- Temperature rating 150°C;
- Fixed precise square wire spring provides secure gripping of conductors;
- Deep skirt entry provides protection from flashover and shorts;
- Sure-grip ribs improve gripping ability and comfort;
- For copper wire only;
- Compact design ensures proper installation, especially in tight spaces;
- Threaded funnel entry guides the wires into the connector easily;
- Pre-twisting of wires is not necessary.

CATALOG NO.	NAED NO.	COLOR CODE	VOLTAGE	WIRE RANGE	PACKAGING		WEIGHT LBS./CTN.	NET PRICE PER 1,000	
					UNIT	CARTON		UNIT	CARTON
WC-HB1-B*	14150	black	300 volt	22-14 AWG	bag of 1,000	10,000 (10 bags of 1,000)	19	53.45	46.50
WC-HB1	14151	black	300 volt	22-14 AWG	bulk	10,000	18	50.90	44.35
WC-HB3-B*	14160	black	300 volt	22-14 AWG	bag of 500	5,000 (10 bags of 500)	19	79.80	69.75
WC-HB3	14161	black	300 volt	22-14 AWG	bulk	10,000	37	76.45	66.50

*Socket installation tools are included at no extra charge in each bag of Easy-Twist connectors (catalog number with "-B" suffix). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.

CRIMP SLEEVE WIRE CONNECTORS



- Copper crimp sleeves are designed for easy installation and provide an exceptional connection.


CATALOG NO.	NAED NO.	WIRE RANGE	PACKAGING		WEIGHT LBS/CTN.	NET PRICE	
			UNIT	CARTON		UNIT	CARTON
SB1810	8120	18-10 AWG	blister box of 100	8,000 (80 boxes of 100)	19	9.70	8.45
SB1810-B	8122	18-10 AWG	bag of 500	15,000 (30 boxes of 500)	36	9.15	7.95
SB1808	8121	18-8 AWG	blister box of 100	5,000 (50 boxes of 100)	23	22.80	19.85
SB1808-B	8123	18-8 AWG	bag of 500	10,000 (20 boxes of 500)	45	22.25	19.35

NYLON CLOSED END



- Made from nylon 6/6 (Polyimide 66);
- UL 94 V-2 self-extinguishing;
- Rated 300 volts;
- Temperature rating to 105°C.

CATALOG NO.	NAED NO.	COLOR CODE	VOLTAGE	WIRE RANGE	PACKAGING		WEIGHT LBS./CTN.	NET PRICE PER 100	
					UNIT	CARTON		UNIT	CARTON
C22-N	06800	natural	300 volt	22-18 AWG	box of 100	1,800 (18 boxes of 100)	4	11.90	10.35
C22-N-B	06850	natural	300 volt	22-18 AWG	bag of 1,000	10,000 (10 bags of 1,000)	12	10.50	9.15
C16-N	06801	natural	300 bolt	22-14 AWG	box of 100	1,800 (18 boxes of 100)	5	11.90	10.35
C16-N-B	06851	natural	300 volt	22-14 AWG	bag of 1,000	10,000 (10 bags of 1,000)	15	10.50	9.15
C12-N	06802	natural	300 volt	22-10 AWG	box of 50	900 (18 boxes of 50)	5	18.60	16.20
C12-N-B	06852	natural	300 volt	22-10 AWG	bag of 1,000	10,000 (10 bags of 1,000)	32	16.15	14.05
C8-N	06803	natural	300 volt	16-10 AWG	box of 25	450 (18 boxes of 25)	4	30.40	26.20
C8-N-B	06853	natural	300 volt	16-10 AWG	bag of 500	5,000 (10 bags of 500)	29	26.30	22.80



DIMENSIONS






CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
C-22-N	2.60	0.102	6.20	0.244	7.80	0.307	6.20	0.244	18.00	0.709
C16-N	3.00	0.118	7.90	0.311	9.50	0.374	7.20	0.283	19.70	0.776
C12-N	4.00	0.157	10.50	0.413	12.50	0.492	9.60	0.378	25.50	1.004
C8-N	5.30	0.209	12.40	0.488	14.60	0.575	12.00	0.472	27.70	1.091

PUSH-IN WIRE CONNECTORS




- Fast, safe and reliable installation saves time and money;
- No twisting or taping of conductors required;
- Just strip the wire, insert the connector and you are done;
- One wire per opening ensures loose connections are eliminated;
- Large wire range: accommodating 22-12 AWG solid copper wire;
- Made of strong, UL 94V-2 flame retardant thermoplastic;
- Rated 600 volts (up to 1,000 volts for fixtures and signs);
- Temperature range from -40°F to 221°F (-30°C to 105°C);
- Integrated test port enables continuity testing;
- Color coded for easy identification;
- Compact design perfect for tight spaces.


CATALOG NO.	NAED NO.	COLOR CODE	NUMBER OF WIRES	PACKAGING		PRICE PER	WEIGHT LBS./CTN.	NET PRICE	
				UNIT	CARTON			UNIT	CARTON
PWC-2-H	14201	red	2	bag of 10 with header	1,000 (100 bags of 10)	pkg.	5	2.15	1.85
PWC-2-C	14211	red	2	box of 100	6,000 (60 boxes of 100)	1,000	24	143.00	125.00
PWC-2-B	14221	red	2	bag of 500	5,000 (10 bags of 500)	1,000	20	125.00	109.00
PWC-3-H	14202	orange	3	bag of 10 with header	1,000 (100 bags of 10)	pkg.	6	2.35	2.05
PWC-3-C	14212	orange	3	box of 100	6,000 (60 boxes of 100)	1,000	30	169.00	147.00
PWC-3-B	14222	orange	3	bag of 500	5,000 (10 bags of 500)	1,000	25	143.00	125.00
PWC-4-H	14203	yellow	4	bag of 10 with header	1,000 (100 bags of 10)	pkg.	8	2.70	2.35
PWC-4-C	14213	yellow	4	box of 100	6,000 (60 boxes of 100)	1,000	38	194.00	169.00
PWC-4-B	14223	yellow	4	bag of 500	5,000 (10 bags of 500)	1,000	32	159.00	139.00
PWC-5-H	14204	grey	5	bag of 10 with header	1,000 (100 bags of 10)	pkg.	9	2.95	2.55
PWC-5-C	14214	grey	5	box of 100	4,800 (48 boxes of 100)	1,000	39	217.00	189.00
PWC-5-B	14224	grey	5	bag of 500	5,000 (10 bags of 500)	1,000	40	177.00	154.00
PWC-8-H	14205	black	8	bag of 6 with header	600 (100 bags of 6)	pkg.	5	3.05	2.65
PWC-8-C	14215	black	8	box of 50	3,000 (60 boxes of 50)	1,000	27	388.00	338.00
PWC-8-B	14225	black	8	bag of 250	2,500 (10 bags of 250)	1,000	22	302.00	263.00




INSTALLATION

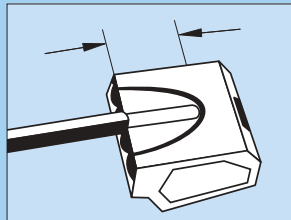

TURN OFF POWER.
Strip wire approximately 0.45 inches (11mm). This length is shown on every connector.

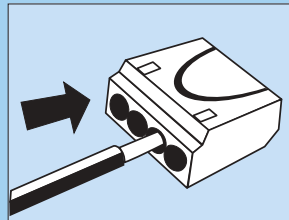

Push the stripped solid conductor into the port of connector fully. No more twisting or taping.

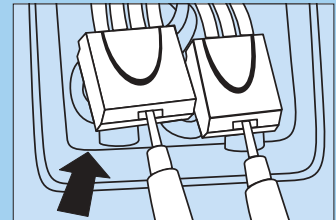

Use a voltage meter to test your connection via the port at the opposite side of the connector (except black where the port is on the same side as the openings).



Alphanumeric Index

CATALOG NUMBER	PAGE
C8	7
C12	7
C16	7
C22	7
ET-CP	2
PC	6
PWC	8
SB	7
WC-B	5
WC-G	5
WC-HB	7
WC-O	5
WC-OH	6
WC-R	5
WC-RH	6
WC-Y	5
WC-YH	6
WWC-B	3
WWC-G	3
WWC-GR	4
WWC-N1	4
WWC-N2	4
WWC-R	3
WWC-T	3
WWC-Y	3

NSi Industries LLC



9730 Northcross Center Ct.
Huntersville
North Carolina, USA
28078



Phone Toll Free:
800.321.5847



Fax Toll Free:
800.841.5566



Email:
nsi@nsiindustries.com



Website:
www.nsiindustries.com

NSi VENDOR NUMBER
662381

Terms of Sale

Vendor Number: 662381

- Prices are F.O.B. our plant.
- Prices do not include any sales tax.
- Freight charges will be prepaid on all orders \$250.00 and over shipping within continental USA using standard shipping methods and service.
- Minimum order – \$100.00.
- Claims for shortage, erroneous charges or price corrections shall be deemed waived unless made in writing, delivered to NSi within 30 days of invoice.
- Terms of payment – 2% 10th prox. net 25th following.
- Warranties – NSi guarantees all products to be free of defects in material and workmanship for a period of 90 days from date of sale. Any claims for defective material must be agreed to in writing by NSi. Defective material will be replaced on an F.O.B. – our factory basis. NSi disclaims the implied warranty of fitness for a particular application.

Other Products Available

NSi can provide many other products for special applications which are not listed in this catalog. If you require an item which you do not find listed, please contact us. We would be pleased to provide a quotation upon receipt of a drawing or a sample.

Guarantee

It is our goal to provide extraordinary products and service on a daily basis. If our products or service do not meet with your satisfaction, please let us know immediately and we promise to make every reasonable effort to remedy the situation.



**FD-103
FLOOR DISPLAY**



2



3



3



3



3



4



5




5



6



7



7



8

**GF-02
GRAVITY
FEED
DISPLAY**



YOUR REPRESENTATIVE:

